



MIR-554-PE

MIR

Cooled Incubators

406 L

All-round performance

The **MIR-554 Cooled Incubator** is suitable for a wide range of applications. This incubator offers precise, repeatable control of programmable temperatures and lighting patterns, which are essential to biological research and environmental studies.

Repetitive Operation & Operability

Precise, repeatable control of programmable temperatures and lighting patterns. A program can be set to repeat for a minimum of one time to a maximum of 98 times or continuous repeat.

High-precision Temperature Control

Precise temperature control with a high precision microprocessor combined with a heater PID and compressor on/off system. The temperature control ranges from -10°C to $+60^{\circ}\text{C}$.

Intuitive Operation

A LCD control panel with touch keyboard displays temperature and time, and allows easy setting of parameters. Operation data can be auto-recorded and graphically displayed.



Diverse experiments

Ideal for experimentation during night time and holidays, experimentation that requires settings to be changed, micro-organism culture and preservation.



Condensation prevention

A humidity reduction mode helps reduce inner chamber condensation that may occur during high temperature operation.



Wide temperature control range from -10°C to $+60^{\circ}\text{C}$

With a wide temperature range from -10°C to $+60^{\circ}\text{C}$, the MIR-554 Cooled Incubator allows a full range of precise experiments including environmental tests to micro-organism cultures and plant germination tests.

MIR Cooled Incubators



Improved experimentation of repetitive operation and operability

Programmable operation function with microprocessor control

Combining flexible temperature (H), light on/off (L) and time control (T), a maximum 12-step plus constant operation or max. 12-step repeating operation can be programmed according to the experimentation requirements. A program can be set to repeat for a minimum of one time to a maximum of 98 times or continuous repeat. The MIR-554 Cooled Incubator also offers the choice of timer mode, 24-hour clock mode and timer mode to suit user experiments. Up to 10 programs can be stored for convenient retrieval and set-up of frequently run experiments. Individual programs can be combined using the join function. Constant operation mode without step operation is also available.

Energy savings

In addition to a microprocessor-controlled high efficient heater output and compressor on/off, an updated control program and low heat-emission inner chamber fan have been incorporated to allow high energy saving operation over a wider range of ambient environments.

Light timer control

On/off programmed timer control for standard equipped LED light (15W x 1pc) is available. Optional light addition kit (MIR-L15) can add three more LED lights into the chamber ceiling.


Model Number		MIR-554-PE
Dimensions		
External dimensions (W x D x H) ¹⁾	mm	800 x 832 x 1810
Internal dimensions (W x D x H)	mm	640 x 550 x 1160
Volume	liters	406
Net weight	kg	195
Performance		
Temperature control range & fluctuation	°C	-10 ~ +60 [AT; +5 ~ +35, no load], ±0.2 with Heater PID control (SV 50), ±1.5 with Compressor control (SV 5) PID control: 10 °C above AT
Temperature uniformity	°C	±0.5°C [set: 37°C, ambient temp.: 20°C, no load]
Control		
Temperature sensor		Thermistor
Refrigeration		
Compressor		250
Refrigerant		R-1234yf
Refrigerant weight	g	240
Refrigerant GWP		0.501
Total Refrigerant weight (CO ₂ equivalent)	t	0.00012
Cooling method		Forced air circulation
Insulation material		PUF
Insulation thickness	mm	80
Construction		
Exterior Material		Painted steel
Interior Material		SS SUS-304
Outer door	qty	1
Outer door lock		Y
Shelves	qty	5
Max. load per shelf	kg	50
Max. total load	kg	250
Access port	qty	2
- position		left and right side
- diameter	Ø mm	40
Interior LED lamp		1, [3 with MIR-L15-PW ²⁾ option]
Alarms		
(R = Remote Alarm, V = Visual Alarm, B = Buzzer Alarm)		
Power failure		R
High temperature		V-B-R
Low temperature		V-B-R
Door open		V-B
Electrical and noise level		
Power supply	V	230
Frequency	Hz	50
Noise level ³⁾	dB(A)	45
Options		
Additional LED kit		MIR-L15-PW
Inner doors		MIR-55ID-PW

Appearance and specifications are subject to change without notice.

¹⁾ Exterior dimensions of main cabinet only, excluding handle and other external projections

²⁾ MIR-L15-PW operates between +2°C and +50°C

³⁾ Nominal value, Background noise 20dB

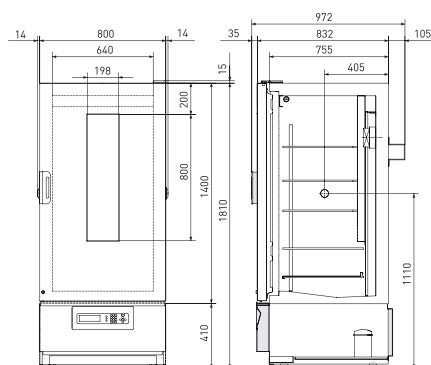

MIR-554-PE - 406 liters

Unit : mm

PHC Europe

A Member of PHC Group

Eikdonk 1 | 4825 AZ Breda | Netherlands

T: +31 (0) 76 543 3833

www.phchd.com/eu/biomedical